



JUMBO SHAFT DATA

When ordering a shaft, specify the following:

1. Jumbo Rotary Seal.
2. Type of shaft desired. Automotive or regular. GCr-850, 851, 852, 853 are provided with hand operating features.
3. The "EL" (extended length) dimension. 2 1/2" must protrude beyond outer wall of vehicle if outer bearing housing is used. 1 1/2", if not.

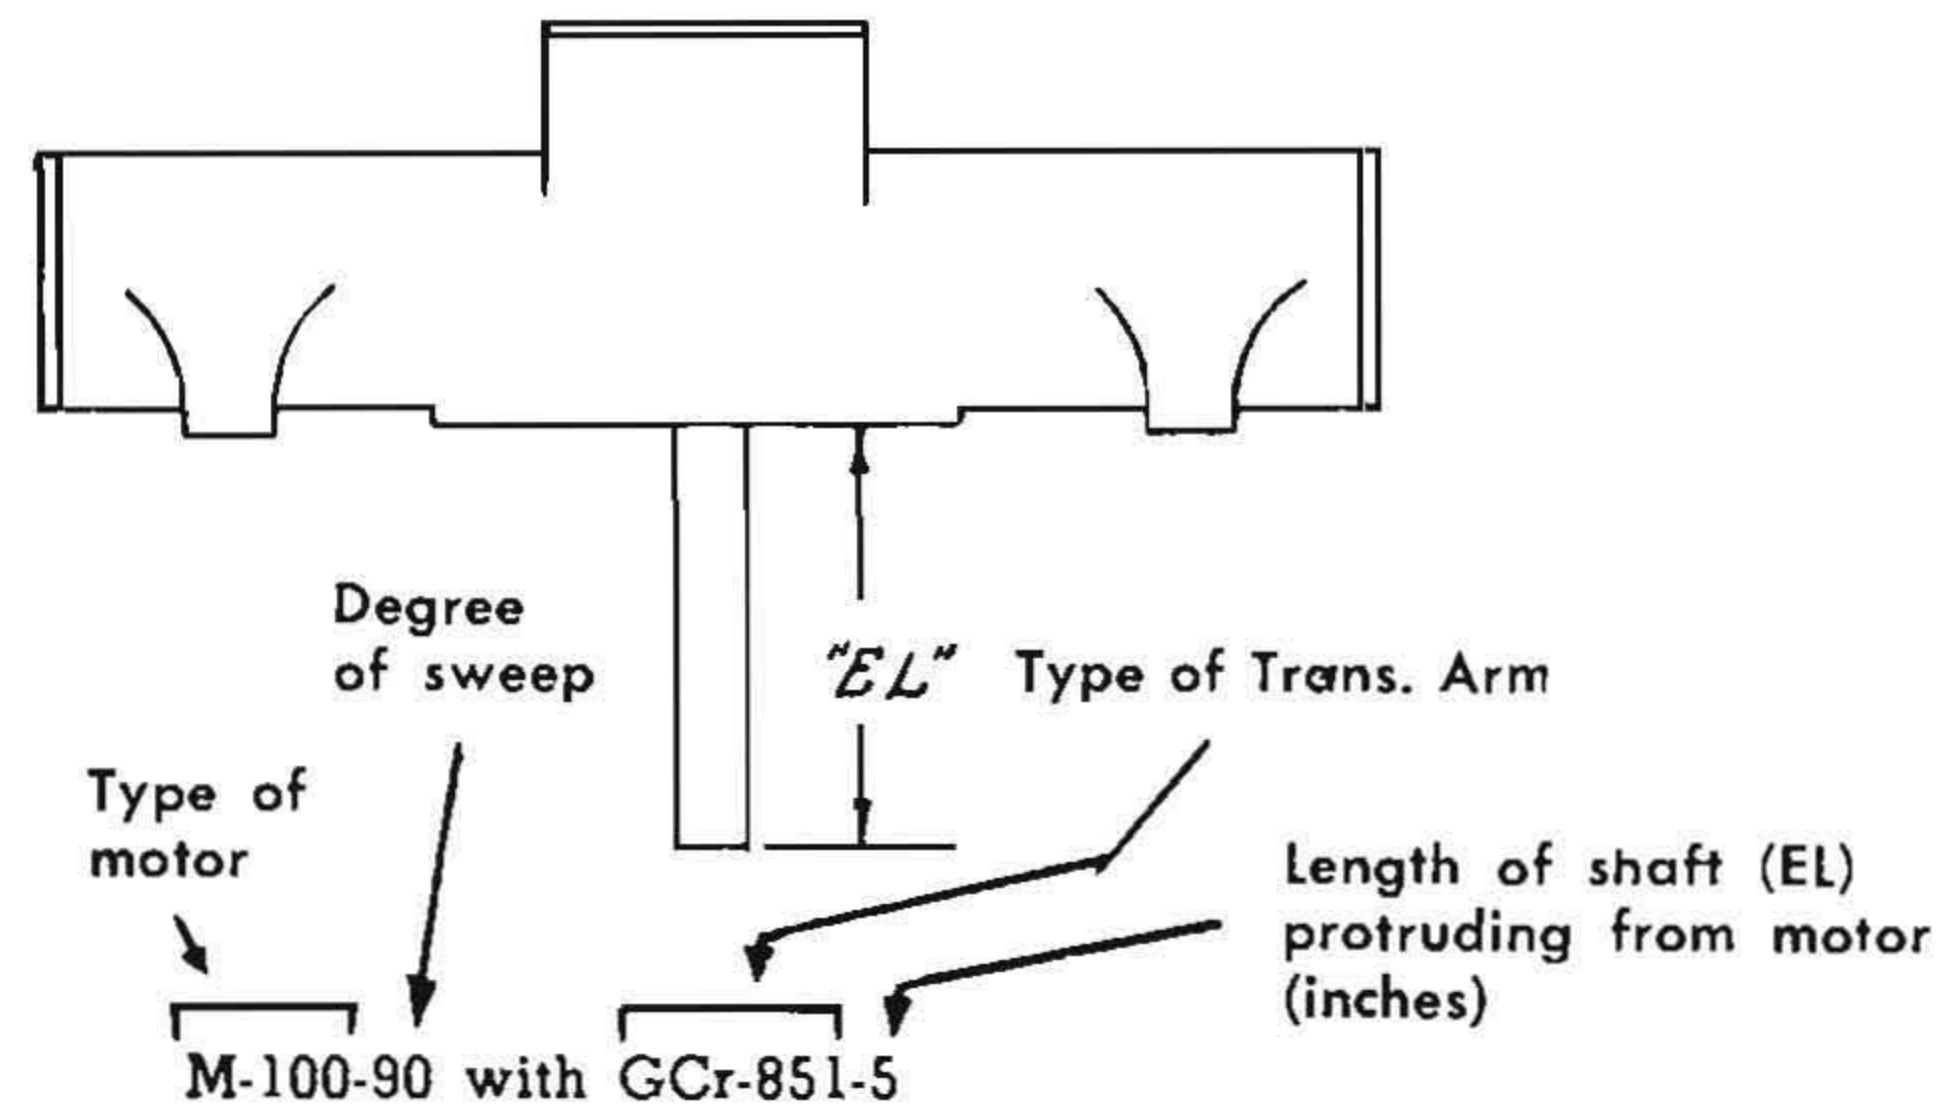

When ordering a Jumbo Rotary-seal Motor, use the above Part Number example.



Automotive uses tapered serrations to hold arm fixed on shaft.

Regular uses set screw to hold arm fixed on shaft.

<p>GCa-850-EL Jumbo (5/16" Shaft)</p> <p>GCa-856-EL Jumbo (3/8" Shaft)</p>	<p>GCa-851-EL Jumbo (5/16" Shaft)</p> <p>GCa-857-EL Jumbo (3/8" Shaft)</p>	<p>GCa-852-EL Jumbo (5/16" Shaft)</p> <p>GCa-858-EL Jumbo (3/8" Shaft)</p>	<p>GCa-853-EL Jumbo (5/16" Shaft)</p> <p>GCa-859-EL Jumbo (3/8" Shaft)</p>	<p>GCa-854-EL Jumbo (5/16" Shaft)</p> <p>GCa-860-EL Jumbo (3/8" Shaft)</p>	<p>GCa-855-EL Jumbo (5/16" Shaft)</p> <p>GCa-861-EL Jumbo (3/8" Shaft)</p>
<p>GCr-850-EL Jumbo R. S. (5/16" Shaft)</p> <p>GCr-856-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-851-EL Jumbo R. S. (5/16" Shaft)</p> <p>GCr-857-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-852-EL Jumbo R. S. (5/16" Shaft)</p> <p>GCr-858-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-853-EL Jumbo R. S. (5/16" Shaft)</p> <p>GCr-859-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-854-EL Jumbo R. S. (5/16" Shaft)</p> <p>GCr-860-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-855-EL Jumbo R. S. (5/16" Shaft)</p> <p>GCr-861-EL Jumbo R. S. (3/8" Shaft)</p>
<p>GCr-862-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-863-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-864-EL Jumbo R. S. (3/8" Shaft)</p>	<p>GCr-867-EL Jumbo R. S. (3/8" Shaft)</p>		
<p>G5r-850-EL Jumbo R. S. (5/16" Shaft)</p>	<p>G5r-851-EL Jumbo R. S. (5/16" Shaft)</p>	<p>G5r-852-EL Jumbo R. S. (5/16" Shaft)</p>	<p>G5r-853-EL Jumbo R. S. (5/16" Shaft)</p>		