


## JUMBO SHAFT DATA

When ordering a shaft, specify the following:

1. Jumbo Rotary Seal.
2. Type of shaft desired. Automotive or regular. GCr-850, 851, 852, 853 are provided with hand operating features.
3. The "EL" (extended length) dimension. 2½" must protrude beyond outer wall of vehicle if outer bearing housing is used. 1½", if not.

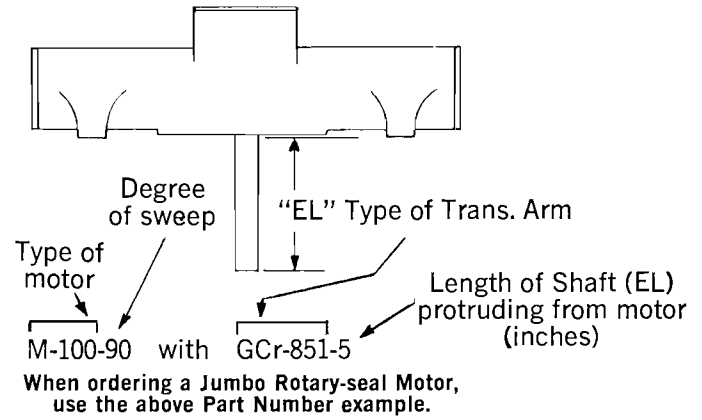

## JUMBO MOTOR TRANSMISSION SHAFTS

<b>GCa-850-EL</b> Jumbo (¾" Shaft)	<b>GCa-851-EL</b> Jumbo (¾" Shaft)	<b>GCa-852-EL</b> Jumbo (¾" Shaft)	<b>GCa-853-EL</b> Jumbo (¾" Shaft)	<b>GCa-854-EL</b> Jumbo (¾" Shaft)	<b>GCa-855-EL</b> Jumbo (¾" Shaft)
<b>GCa-856-EL</b> Jumbo (¾" Shaft)	<b>GCa-857-EL</b> Jumbo (¾" Shaft)	<b>GCa-858-EL</b> Jumbo (¾" Shaft)	<b>GCa-859-EL</b> Jumbo (¾" Shaft)	<b>GCa-860-EL</b> Jumbo (¾" Shaft)	<b>GCa-861-EL</b> Jumbo (¾" Shaft)
<b>GCr-850-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-851-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-852-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-853-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-854-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-855-EL</b> Jumbo R. S. (¾" Shaft)
<b>GCr-856-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-857-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-858-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-859-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-860-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-861-EL</b> Jumbo R. S. (¾" Shaft)
<b>GCr-862-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-863-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-864-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-867-EL</b> Jumbo R. S. (¾" Shaft)	<b>GCr-869-EL</b> (3/8" Dia.)	<b>GCr-870-EL</b> (5/16" Dia.)
<b>GSR-850-EL</b> Jumbo R. S. (¾" Shaft)	<b>GSR-851-EL</b> Jumbo R. S. (¾" Shaft)	<b>GSR-852-EL</b> Jumbo R. S. (¾" Shaft)	<b>GSR-853-EL</b> Jumbo R. S. (¾" Shaft)	<b>GSR-855-EL</b> Jumbo R. S. (5/16" Dia.)	<b>GCr-871-EL</b> (3/8" Dia.)