
WWC & SUPER C UNITIZED

THE ELECTRO SYSTEMS HEAVY DUTY UNITIZED WINDSHIELD WIPER IS DESIGNED FOR TRUCKS, BUSES, WALK-IN DELIVERIES, CONSTRUCTION EQUIPMENT, AND OTHER VEHICLES WHERE IT IS NECESSARY TO SWING A SINGLE ARM AND BLADE. A DUAL INSTALLATION USING ONE MOTOR AND TWO ARMS AND BLADES IS POSSIBLE IN MOST INSTANCES DEPENDING ON ARM AND BLADE LENGTHS AND WIPER ANGLE. IDEAL FOR UNDER COWL OR HEADER MOUNTING, THE RUGGED ELECTRIC MOTOR HAS TWO OPERATING SPEEDS.

AUTOMATIC BLADE PARKING IS STANDARD AND A SIMPLE DRIVE ARM SETTING POSITIONS THE PARKED BLADE TO THE LEFT OR RIGHT SIDE ON WINDSHIELD. FIVE WIPE ANGLES FROM 68° TO 127° CAN BE OBTAINED BY USING ONE OF TWO DRIVE ARMS AND SELECTING THE PROPER PIVOT ARM POSITION. UNITIZED ASSEMBLY OF THE MOTOR, BRACKET, LINKAGE, AND PIVOT SHAFT PROVIDES BUILT-ON OSCILLATING MOTION AND ALL COMPONENTS FOR A COMPACT INSTALLATION.

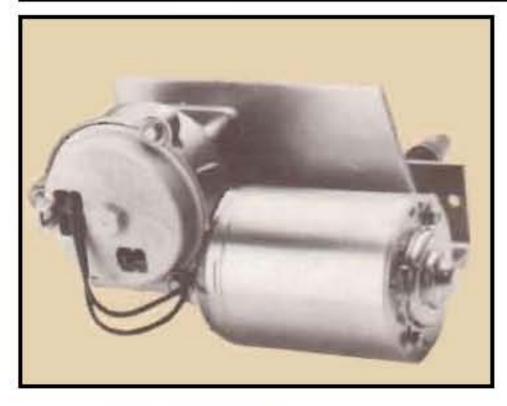


ORDERING GUIDE

ALTHOUGH THIS WWC SERIES HEAVY DUTY WIPER IS OF UNITIZED DESIGN, THE MAJOR COMPONENTS MAY BE ORDERED INDIVIDUALLY TO PERMIT THE MOST SUITABLE CHOICE OF OPERATING VOLTAGE, WIPE ANGLES, AND PIVOT SHAFT LENGTHS. WHEN ORDERING A WIPER MOTOR KIT FOR A UNITIZED INSTALLATION, THREE NUMBERS ARE NECESSARY: (1) MOTOR KIT NO., (2) DRIVE ARM NO., AND (3) PIVOT SHAFT NO. USE THE FOLLOWING CHARTS AND DIAGRAM TO DETERMINE NUMBERS.

MOTOR KIT NUMBER

VOLTAGE _	MOTOR KIT		MOTOR ALONE		NOTE
	WWC	SUPER C	WWC	SUPER C	NOTE
12	WC 19612	WC 31612	WC 19012	WC 31012	ALL ARE 2 SPEED AUTOMATIC PARK.
24	WC 19624	WC 31624	WC 19024	WC 31024	

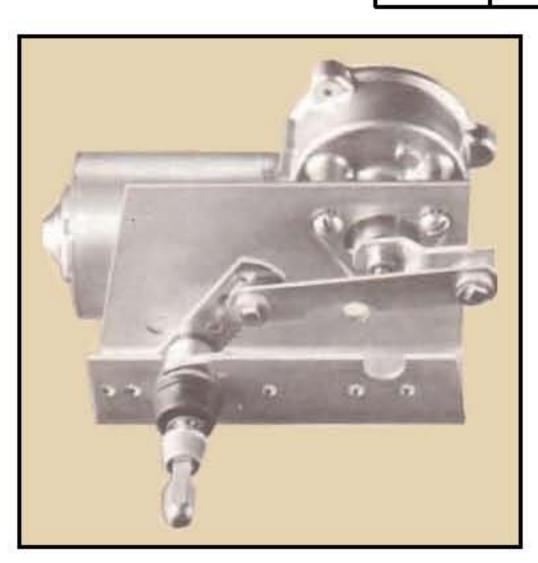


DRIVE ARM NUMBER

WIPE ANGLE	PIN POS. ON MTG.	DRIVE ARM FOR WWC	DRIVE ARM FOR SUPER C			
68°	Α	LE 721125A-1	LE 22001			
85°	В	LE 721125A-1	LE 22001			
93°	Α	LE 721125A-4	LE 22004			
108°	С	LE 721125A-1	LE 22001			
127°	В	LE 721125A-4	LE 22004			

NOTE 1: PIN POSITION C CANNOT BE USED WITH LE 721125A-4 OR LE 22004.

NOTE 2: FOR DOUBLE LINK, SINGLE MOTOR APPLICATION: USE LE 721124A-1 OR LE 721124A-4 FOR WWC; USE LE 43736 OR LE 43737 FOR SUPER C; USE SPACE WA 1216 AS REQUIRED FOR BOTH.

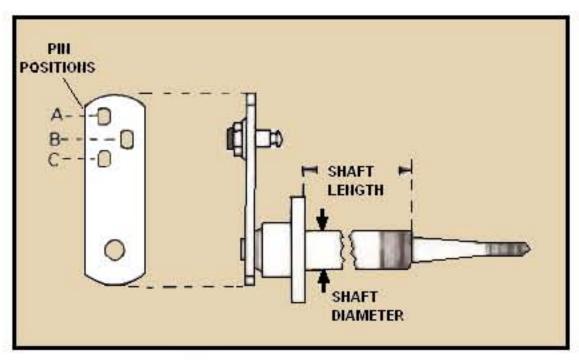

PIVOT SHAFT NUMBER

SHAFT	STANDARD	MARINE	HEAVY DUTY	
LENGTH	.625 SHAFT DIA.	.625 SHAFT DIA.	.688 SHAFT DIA.	
5/8"	SH 721204	SH 721073	SH 721200	
1"	SH 721205	SH 721074	SH 721201	
2"	SH 721206	SH 721075	SH 721202	
3"	SH 721207	SH 721076	SH 721203	